



Please provide: Quotation Order

Date: _____

Contact Details:

Company Name: _____

Reference: _____

Delivery Address: _____

Postcode: _____

Name (present for delivery): _____

Mobile Number: _____

Options:

OVERALL MEASUREMENT

(Including any cill/add-ons)

Recommended: Allow minimum 10mm tolerance between your overall frame size and your opening size

Width: _____ mm

Height: _____ mm

Supplied Fully Assembled*

With exception for Doors over 6000mm in width and/or 2500mm in height, these will be supplied in kit form

Kit Form Required

Sliding Pane/s

Internal* External

Cill

None* 190mm 230mm

Additional 100mm for Cill Horns

Yes* No - same as overall width Other _____ mm

Beading (doors are supplied unglazed)

28mm* (for double glazed units)

Drainage

Face* None (internally used doors only)

Colour/s

White 9016 Gloss Grey 7016 Matt Black 9005 Matt

Grey 7016 / White 9016 Black 9005 / White 9016

Special: External RAL _____ Internal RAL _____

Handles

Handles Internal & External*

Handles Internal with 1* Half Cylinder & External Blanking Plate^A

MK3 P Handles

White* Black Grey Chrome Gold Satin

Prolinea D Handles


White Black Smokey Chrome Gold Satin

Blu Stainless Steel Bar


Satin Black

Configuration: VIEWED FROM OUTSIDE

MONORAIL / SINGLE TRACK




OX
 50mm Interlock^B




XO
 50mm Interlock^B


DOUBLE TRACK




OX
 50mm Interlock
 25mm Interlock




XO
 50mm Interlock
 25mm Interlock



XX
 50mm Interlock
 25mm Interlock
 Ext Slider on Left
 Ext Slider on Right




OXXO
 50mm Interlock
 25mm Interlock




XXXX
 50mm Interlock
 25mm Interlock
 Ext Sliders Centre
 Ext Sliders Outer


TRIPLE TRACK




OXX
 50mm Interlock
 25mm Interlock




XXO
 50mm Interlock
 25mm Interlock



XXX
 50mm Interlock
 25mm Interlock
 Ext Slider on Left
 Ext Slider on Right

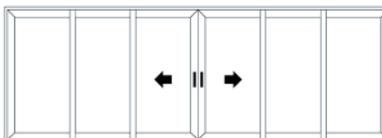

OXXO
 50mm Interlock
 25mm Interlock

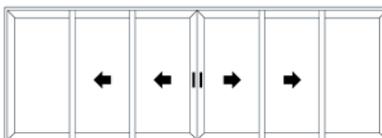

OXXXXO
 50mm Interlock
 25mm Interlock

Vents and Add-ons (trickle vents are only available in white, grey and black)

Flush Vents in sash (1540mm²) 2 3 4 5 6

Vents in 35mm Add-on (4000mm²) 1 2 3 4 5 6

35mm Add-on Top Left Right

*As standard

^ANot PAS24:2022 compliant

^BExternal Sliding Pane - no option for internal slider

Features and Benefits:


- Super slim 25mm interlock or 50mm non-bonded interlock
- Qualicoat “Seaside” powder coating specification as standard
- Security tested to PAS24:2022
- Energy Rated C
- U values as low as 1.4 U/Wm²K
- Multi-locking mechanism
- Trickle vent in sashes or add-on
- Market-leading sash sizes of up to 2.5m x 2.7m per sash
- Three different handle offerings
- MONO / Single track out frame depth of 112mm
- Double track outer frame depth of 120mm
- Triple track outer frame depth of 183mm

Size and Weight Restrictions Per Sash:


Doors over 6000mm in width and/or 2500mm in height, will be supplied in kit form

TRACK / FRAME OPTIONS:


MONORAIL / SINGLE TRACK

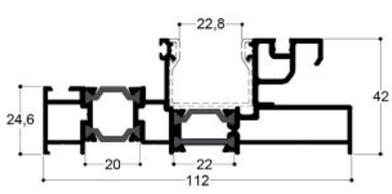

DOUBLE TRACK




TRIPLE TRACK

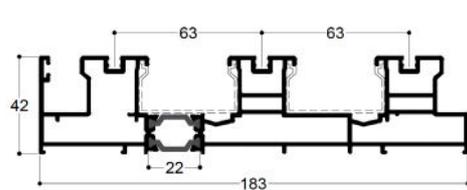


HANDLE OPTIONS:


MK3 P HANDLES



PROLINEA D HANDLES




BLU STAINLESS STEEL BAR HANDLES




INTERLOCK OPTIONS:

50MM



25MM



PLEASE NOTE:

The 25mm Interlock requires bonding between the glass and interlock. Watch a demonstration by scanning the QR code to the left, or view our installation guide at www.sliders-uk.com



Sliders UK (Doors and Windows) Limited
 220 Cocker Road, Walton Summit Centre,
 Preston, Lancashire PR5 8BP
 T : 01772 698222 E : sales@sliders-uk.com
 W : www.sliders-uk.com

