



Please provide: ☐ Quotation ☐ Order

Date: _____

Contact Details:

Reference: _____

Contact Name: _____

Company Name: _____

Contact Telephone Number: _____

Delivery Address: _____

Signature: _____

Postcode: _____

PLEASE NOTE:

All windows are supplied UNGLAZED. We recommend you allow a minimum of 10mm tolerance between your overall frame size and your opening size
All opening sashes are internally glazed. All fixed lights are externally glazed unless otherwise stated
PART L - It is your responsibility to order the correct glazing specification which is specific to your project to meet current building regulations.
PART F AND O - It is your responsibility to order the correct number of trickle vents which will give the required room ventilation to each finished product to meet current building regulations.

PLEASE USE THE FOLLOWING: E = Egress/Easy Clean Hinge (side hung) D = Dummy Sash M = Main Opening Sash (French Windows)
< = Hinged Left > = Hinged Right ^ = Top Hung + = Fixed Pane

NAME/REF: _____	Frame: ☐ SLIM* ☐ COMM ☐ FLUSH ☐ TILT&TURN Width _____ mm Height _____ mm APX 3 Part Cill: ☐ 100mm ☐ 150mm* ☐ 180mm ☐ 220mm Bifold Cill: ☐ 90mm ☐ 150mm ☐ 190mm ☐ 230mm Additional 100mm for cill horns: ☐ No* ☐ Yes Coupler: ☐ Connector Blocks ^a ☐ 25mm ^b ☐ 40mm ^b Coupler Position: ☐ Left ☐ Top ☐ Right ☐ Bottom Add-on: ☐ 25mm ☐ 40mm ☐ 50mm Add-on Position: ☐ Left ☐ Top ☐ Right ☐ Bottom Bead: ☐ 28mm Double* ☐ 40mm Triple Trickle Vent: ☐ in 40mm Add-on ☐ Hood with 40mm Add-on	Drainage: ☐ Face ☐ Concealed (only with cill) Egress/Easy Clean Hinge: ☐ Yes Colour: ☐ White 9016* ☐ Grey 7016 ☐ Black 9005 ☐ Grey on White ☐ Black on White Special Colours: RAL _____ / RAL _____ Inline Locking Handles:* ☐ White ☐ Black ☐ Anthracite Grey ☐ Satin Chrome ☐ PVD Gold ☐ Chrome Blu Stainless Steel Handles: ☐ Satin Stainless Steel ☐ PVD Satin Brass ☐ PVD Satin Black *Standard ^aSuitable for window to bifold or general frame connection ^bSuitable for window to window, not window to bifold
SKETCH ALL FRAMES VIEWED FROM OUTSIDE		
QTY ____		

NAME/REF: _____	Frame: ☐ SLIM* ☐ COMM ☐ FLUSH ☐ TILT&TURN Width _____ mm Height _____ mm APX 3 Part Cill: ☐ 100mm ☐ 150mm* ☐ 180mm ☐ 220mm Bifold Cill: ☐ 90mm ☐ 150mm ☐ 190mm ☐ 230mm Additional 100mm for cill horns: ☐ No* ☐ Yes Coupler: ☐ Connector Blocks ^a ☐ 25mm ^b ☐ 40mm ^b Coupler Position: ☐ Left ☐ Top ☐ Right ☐ Bottom Add-on: ☐ 25mm ☐ 40mm ☐ 50mm Add-on Position: ☐ Left ☐ Top ☐ Right ☐ Bottom Bead: ☐ 28mm Double* ☐ 40mm Triple Trickle Vent: ☐ in 40mm Add-on ☐ Hood with 40mm Add-on	Drainage: ☐ Face ☐ Concealed (only with cill) Egress/Easy Clean Hinge: ☐ Yes Colour: ☐ White 9016* ☐ Grey 7016 ☐ Black 9005 ☐ Grey on White ☐ Black on White Special Colours: RAL _____ / RAL _____ Inline Locking Handles:* ☐ White ☐ Black ☐ Anthracite Grey ☐ Satin Chrome ☐ PVD Gold ☐ Chrome Blu Stainless Steel Handles: ☐ Satin Stainless Steel ☐ PVD Satin Brass ☐ PVD Satin Black *Standard ^aSuitable for window to bifold or general frame connection ^bSuitable for window to window, not window to bifold
SKETCH ALL FRAMES VIEWED FROM OUTSIDE		
QTY ____		



PLEASE NOTE:

All windows are supplied UNGLAZED. We recommend you allow a minimum of 10mm tolerance between your overall frame size and your opening size

All opening sashes are internally glazed

All fixed lights are externally glazed unless otherwise stated

PART L - It is your responsibility to order the correct glazing specification which is specific to your project to meet current building regulations.


PART F AND O - It is your responsibility to order the correct number of trickle vents which will give the required room ventilation to each finished product to meet current building regulations.

PLEASE USE THE FOLLOWING: E = Egress/Easy Clean Hinge (side hung) D = Dummy Sash M = Main Opening Sash (French Windows)


< = Hinged Left > = Hinged Right ^ = Top Hung + = Fixed Pane

NAME/REF: _____	Frame: ☐ SLIM* ☐ COMM ☐ FLUSH ☐ TILT&TURN Width _____ mm Height _____ mm APX 3 Part Cill: ☐ 100mm ☐ 150mm* ☐ 180mm ☐ 220mm Bifold Cill: ☐ 90mm ☐ 150mm ☐ 190mm ☐ 230mm Additional 100mm for cill horns: ☐ No* ☐ Yes Coupler: ☐ Connector Blocks ^a ☐ 25mm ^b ☐ 40mm ^b Coupler Position: ☐ Left ☐ Top ☐ Right ☐ Bottom Add-on: ☐ 25mm ☐ 40mm ☐ 50mm Add-on Position: ☐ Left ☐ Top ☐ Right ☐ Bottom Bead: ☐ 28mm Double* ☐ 40mm Triple Trickle Vent: ☐ in 40mm Add-on ☐ Hood with 40mm Add-on	Drainage: ☐ Face ☐ Concealed (only with cill) Egress/Easy Clean Hinge: ☐ Yes Colour: ☐ White 9016* ☐ Grey 7016 ☐ Black 9005 ☐ Grey on White ☐ Black on White Special Colours: RAL _____ / RAL _____ Inline Locking Handles:* ☐ White ☐ Black ☐ Anthracite Grey ☐ Satin Chrome ☐ PVD Gold ☐ Chrome Blu Stainless Steel Handles: ☐ Satin Stainless Steel ☐ PVD Satin Brass ☐ PVD Satin Black *Standard ^aSuitable for window to bifold or general frame connection ^bSuitable for window to window, not window to bifold
SKETCH ALL FRAMES VIEWED FROM OUTSIDE		
QTY _____		
NAME/REF: _____	Frame: ☐ SLIM* ☐ COMM ☐ FLUSH ☐ TILT&TURN Width _____ mm Height _____ mm APX 3 Part Cill: ☐ 100mm ☐ 150mm* ☐ 180mm ☐ 220mm Bifold Cill: ☐ 90mm ☐ 150mm ☐ 190mm ☐ 230mm Additional 100mm for cill horns: ☐ No* ☐ Yes Coupler: ☐ Connector Blocks ^a ☐ 25mm ^b ☐ 40mm ^b Coupler Position: ☐ Left ☐ Top ☐ Right ☐ Bottom Add-on: ☐ 25mm ☐ 40mm ☐ 50mm Add-on Position: ☐ Left ☐ Top ☐ Right ☐ Bottom Bead: ☐ 28mm Double* ☐ 40mm Triple Trickle Vent: ☐ in 40mm Add-on ☐ Hood with 40mm Add-on	Drainage: ☐ Face ☐ Concealed (only with cill) Egress/Easy Clean Hinge: ☐ Yes Colour: ☐ White 9016* ☐ Grey 7016 ☐ Black 9005 ☐ Grey on White ☐ Black on White Special Colours: RAL _____ / RAL _____ Inline Locking Handles:* ☐ White ☐ Black ☐ Anthracite Grey ☐ Satin Chrome ☐ PVD Gold ☐ Chrome Blu Stainless Steel Handles: ☐ Satin Stainless Steel ☐ PVD Satin Brass ☐ PVD Satin Black *Standard ^aSuitable for window to bifold or general frame connection ^bSuitable for window to window, not window to bifold
SKETCH ALL FRAMES VIEWED FROM OUTSIDE		
QTY _____		
NAME/REF: _____	Frame: ☐ SLIM* ☐ COMM ☐ FLUSH ☐ TILT&TURN Width _____ mm Height _____ mm APX 3 Part Cill: ☐ 100mm ☐ 150mm* ☐ 180mm ☐ 220mm Bifold Cill: ☐ 90mm ☐ 150mm ☐ 190mm ☐ 230mm Additional 100mm for cill horns: ☐ No* ☐ Yes Coupler: ☐ Connector Blocks ^a ☐ 25mm ^b ☐ 40mm ^b Coupler Position: ☐ Left ☐ Top ☐ Right ☐ Bottom Add-on: ☐ 25mm ☐ 40mm ☐ 50mm Add-on Position: ☐ Left ☐ Top ☐ Right ☐ Bottom Bead: ☐ 28mm Double* ☐ 40mm Triple Trickle Vent: ☐ in 40mm Add-on ☐ Hood with 40mm Add-on	Drainage: ☐ Face ☐ Concealed (only with cill) Egress/Easy Clean Hinge: ☐ Yes Colour: ☐ White 9016* ☐ Grey 7016 ☐ Black 9005 ☐ Grey on White ☐ Black on White Special Colours: RAL _____ / RAL _____ Inline Locking Handles:* ☐ White ☐ Black ☐ Anthracite Grey ☐ Satin Chrome ☐ PVD Gold ☐ Chrome Blu Stainless Steel Handles: ☐ Satin Stainless Steel ☐ PVD Satin Brass ☐ PVD Satin Black *Standard ^aSuitable for window to bifold or general frame connection ^bSuitable for window to window, not window to bifold
SKETCH ALL FRAMES VIEWED FROM OUTSIDE		
QTY _____		


ALUNA+ CASEMENT WINDOWS

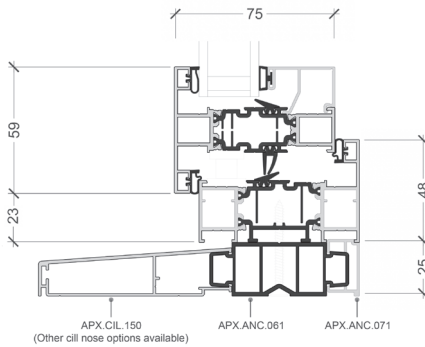


SLIM SASH (STANDARD FRAME)

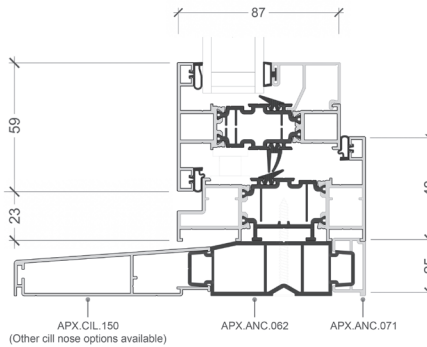

FLUSH FRAME

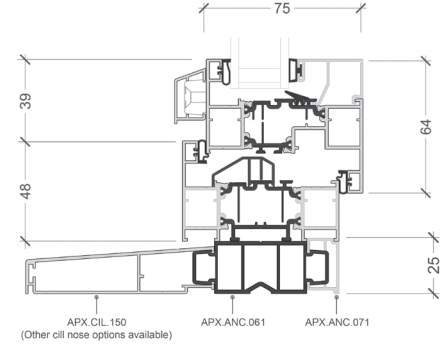


TILT AND TURNS

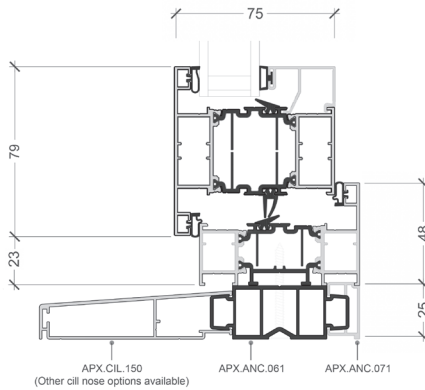


**COMMERCIAL REPLICA SASH
(STANDARD FRAME)**

PARAMETERS

Sash Type:	Width (mm)		Height (mm)	
	(max)	(min)	(max)	(min)
Top Hung	1500	380	1500	280
Side Hung	950	250	1500	380
Tilt Turn	1500	500	2500	500

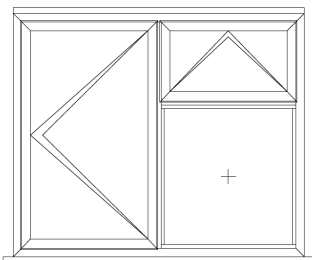


Fixed panes with a opening sash will always be externally beaded, unless a dummy (internal beaded) has been requested.

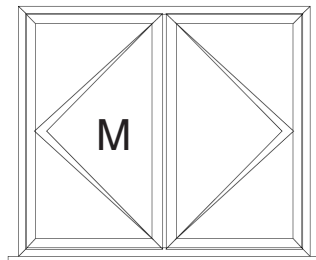


French Windows: Choose either the left or right opening sash to be the main opener.




Fixed pane (no opening sash) internally beaded

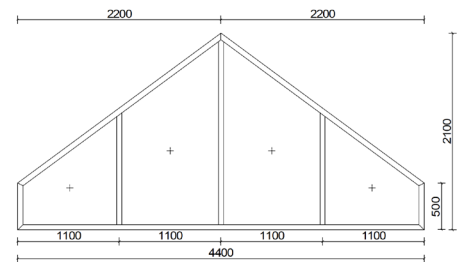

Shape Frames: Provide the total width and height, plus the width inbetween each mullion. Please note: Fabrication has a minimum 25° angle.

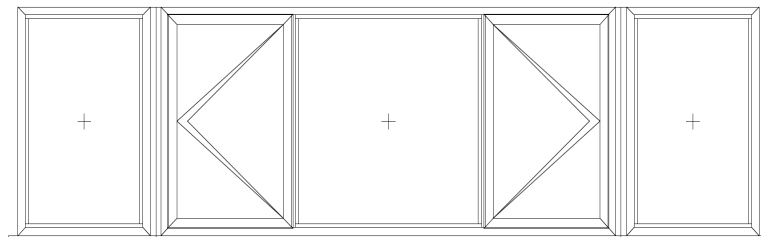

Bay Windows: Please state external measurements and the desired **internal angle** (for example; 135°). Bay pole options of 45°, 90°.



Tilt & Turns (with weather bar)
Hinged Right & Bottom (as shown)
or Hinged Left & Bottom.

PLEASE USE THE FOLLOWING: E = Egress/Easy Clean Hinge (side hung) D = Dummy Sash M = Main Opening Sash (French Windows)
< = Hinged Left > = Hinged Right ^ = Top Hung + = Fixed Pane