


FITTING GUIDE

BLU SST100 – LEVER LOCK PIN INSTALLATION

LIT-FG-SST100

1

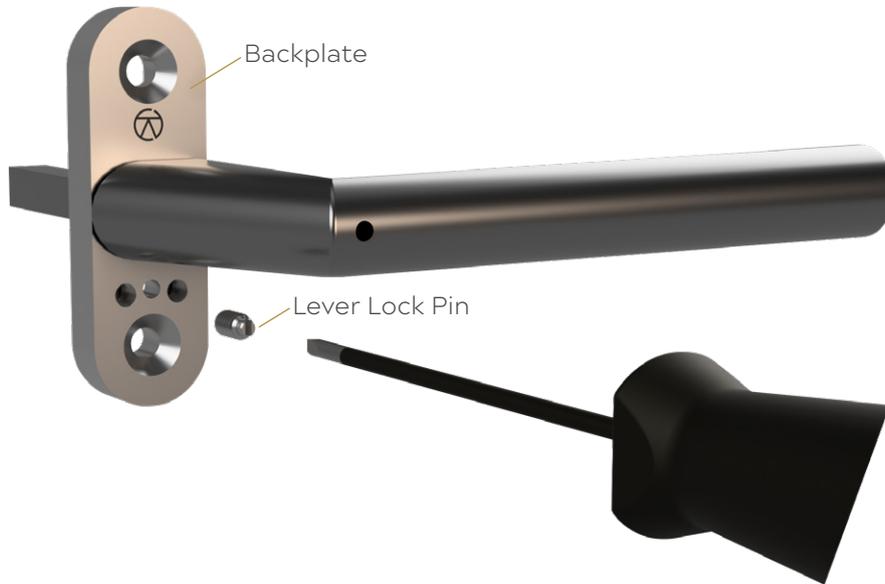

Determine the lever handing, if the lever is for a Right Hand sash then the Lever Lock Pin needs to be installed into the Left-Hand threaded hole in the backplate using a screwdriver.

NOTE: For Left Hand sash use right hand hole in backplate.

2



Screw the peg in so the thread site about flush to the backplate and the head is protruding out.

3



Now the lever will not travel past the vertical position.