

Please provide: Quotation Order

Date: _____

Contact Details:

Company Name:

Reference:

Delivery Address:

Postcode:

Name (present for delivery):

Mobile Number:

Main Requirements:

Externally Viewed



Total number of doors



Number of doors folding left



Number of doors folding right

Overall Measurement (including any cill / add-ons):

Width: _____ mm

Height: _____ mm

Recommended: Allow minimum 10mm tolerance between your overall frame size and your opening size

Opening direction:

Outwards* Inwards

Cill (cill height is 25mm and included in overall frame height):

None* Stub 150mm 190mm

Additional 100mm for Cill Horns

Yes* No - same as overall width Other _____ mm

Beading (supplied unglazed):

28mm* (for double glazed - pre-gasketed clip in bead)
 36mm (for triple glazed - separate bead and wedge gasket)

Delivery Options:

Fully assembled - with outer frame joints sealed with silicon*
 Outerframe sealed but sashes separate
 Kit form (compulsory if over 6500mm in width and / or 2500mm in height)

*As standard

^Only available in Brushed Satin Silver - We advise you choose the shootbolt handle to match either the profile or D Handle/Hinge colour.

Additional Options:

Bottom Track Detail:

- Weather Rated Threshold*
 Integrated threshold with 150mm cill
 20mm Silver Anodised Low Threshold - NOT Weather Rated
 Low Threshold (above) + Silver Anodised Rebate
 Low Threshold (above) + Silver Anodised Convenience Ramp
 Low Threshold (above) + Silver Anodised Rebate + Ramp

Drainage

- Face* Concealed (only with cill)
 None (internally used doors only)

Vents and Add-ons (trickle vents are only available in white, grey and black)

Vents in sash (3000mm²) 2 3 4 5 6 7

38mm Add-on Top Left Right

Vents in Top Add-on (4000mm²) 1 2 3 4 5 6

Colour/s

- White 9016 Gloss Grey 7016 Matt Black 9005 Matt
 Grey 7016 / White 9016 Black 9005 / White 9016
 Special: External RAL _____ Internal RAL _____

Main Handle Option

- Lever/Lever* Lever/Lever with Split Escutcheon[^]

Lever/Lever & Shootbolt Door Handle Colours

- White Grey Black Chrome
 Grey / White Black / White Satin

D Handle and Hinge Colours

- Black* Grey 7016 White

Dual Colours and Special Colours - ONLY available in Black

Non Doc Q / PAS24 Locking Options (see page 2 configurations):

- Standard - Internal locking shootbolt with cylinder
 Internal / External locking shootbolt with cylinder

Notes:

Sliders UK (Doors and Windows) Limited
 Unit 232, Oldfield Road, Walton Summit,
 Bamber Bridge, Lancashire PR5 8BG
 T : 01772 698222 E : sales@sliders-uk.com
 W : www.sliders-uk.com



Features and Benefits:

- Maximum height 3000mm (with lock extension)
- Maximum sash width 1200mm
- Adjustable jambs for easy installation and adjustment
- Ultra smooth bottom running
- Slim sightlines
- Stock colours (White, Grey, Grey on White, Black and Black on White) on short reliable lead times
- Dual Colour & Special Finishes available
- Qualicoat "Seaside" powder coating specification as standard
- Intermediate doors have concealed shoot bolt locking with single point handle. Key locking optional
- Option for access from outside on any configuration
- Colour matched handles and magnetic door holders
- Opening either in or out
- 30mm polyamide thermal break for increased thermal values
- Inline system with sash and outer frame the same depth
- Tested to BS6375-1:2004 and achieved Severe Weather Rating
- Document Q Compliant, Including PAS24 and BS6375 Part 1 & 2

Size and Weight Restrictions:

	Min	Max
Overall Width:	1365mm	8400mm
Overall Height:	1800mm	3000mm
Panel Width:	600mm	1200mm
Weight Per Panel:		120kg


Doors over 6500mm in width and/or 2500mm in height, will be supplied in kit form

Prior to delivery, The Ultimate EVO Bi-folding Doors will be fully assembled (unless KIT form has been requested or required) and its operation carefully checked. No responsibility will be accepted unless the doors have been installed fully square, plumb and level in accordance with the code of practice for the installation of aluminium doors and windows (COP)W362/2. Toe and heeling of sashes is required.

CONFIGURATIONS

Externally Viewed

Reverse configurations also available, eg. 3-3-0 and 3-0-3

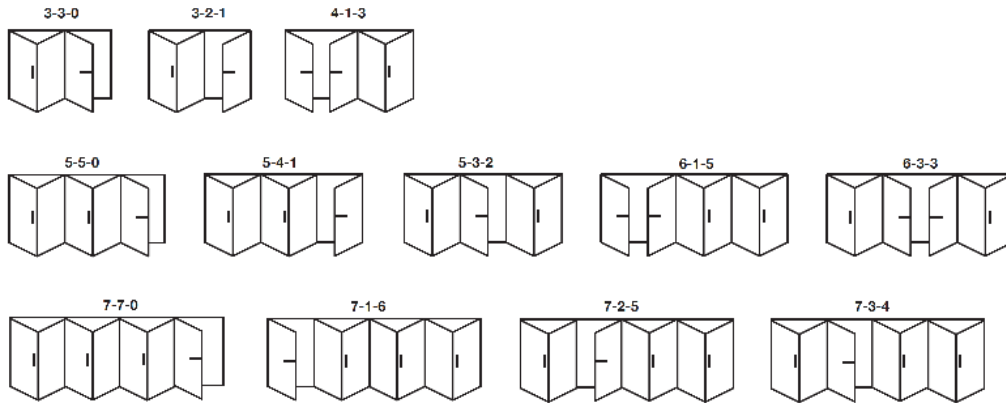

— **Internal & External Main Access Door Handle Position**


Lever/Lever with cylinder & key

| **Shootbolt Handle Position**

Internal handle without cylinder or key

Non Document Q / PAS24 Compliant

Reverse configurations also available, eg. 2-0-2 and 2-2-0

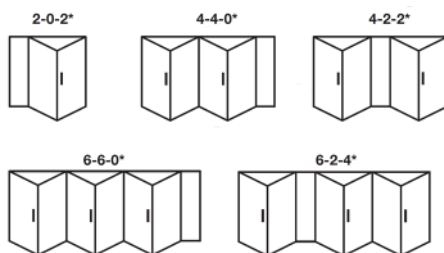

*No external access as standard for these configurations
Handles displayed are internal positioned

Both 'Internal locking with cylinder' and 'Internal / External locking with cylinder' options DO NOT comply with Document Q / PAS24

Sliders UK (Doors and Windows) Limited
Unit 232, Oldfield Road, Walton Summit,
Bamber Bridge, Lancashire PR5 8BG
T : 01772 698222 E : sales@sliders-uk.com

W : www.sliders-uk.com

