



Please provide: ☐ Quotation ☐ Order

Date: \_\_\_\_\_

Contact Details:

Company Name: \_\_\_\_\_

Reference: \_\_\_\_\_

Delivery Address: \_\_\_\_\_

Postcode: \_\_\_\_\_

Name (present for delivery): \_\_\_\_\_

Mobile Number: \_\_\_\_\_

Main Requirements:

Externally Viewed

Total number of doors

Number of doors folding left

Number of doors folding right

Overall Measurement (including any cill, corner post, jamb, add-ons):

Width: \_\_\_\_\_ mm

Height: \_\_\_\_\_ mm

Recommended: Allow minimum 10mm tolerance between your overall frame size and your opening size

Opening direction:

☐ Outwards\* ☐ Inwards

Corner Post:

☐ Left ☐ Right

Cill (cill height is 25mm and included in overall frame height):

☐ None\* ☐ Stub ☐ 150mm ☐ 190mm

Additional 100mm for Cill Horns

☐ Yes\* ☐ No - same as overall width ☐ Other \_\_\_\_\_ mm

Beading (supplied unglazed):

☐ 28mm\* (for double glazed - pre-gasketed clip in bead)

☐ 36mm (for triple glazed - separate bead and wedge gasket)

Delivery Options:

☐ Fully assembled - with outer frame joints sealed with silicone\*

☐ Outerframe sealed but sashes separate

☐ Kit form (compulsory if over 6500mm in width and / or 2500mm in height)

Configuration: VIEWED FROM OUTSIDE

Bottom Track Detail:

☐ Weather Rated Threshold\*

☐ Integrated threshold with 150mm cill

☐ 20mm Silver Anodised Low Threshold - NOT Weather Rated

☐ Low Threshold (above) + Silver Anodised Rebate

☐ Low Threshold (above) + Silver Ext. Anodised Convenience Ramp

☐ Low Threshold (above) + Silver Int/Ext. Anodised Convenience Ramp

☐ Low Threshold (above) + Silver Anodised Rebate + Ext. Ramp

Drainage

☐ Face\* ☐ Concealed (only with cill)

☐ None (internally used doors only)

Vents and Add-ons (trickle vents are only available in white, grey and black)

Vents in 38mm Add-on (4000mm<sup>2</sup>) ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 ☐ 6

20mm Add-on ☐ Top ☐ Left ☐ Right

38mm Add-on ☐ Top ☐ Left ☐ Right

Profile Colour/s

☐ White 9016 Gloss ☐ Grey 7016 Matt ☐ Black 9005 Matt

☐ Grey 7016 / White 9016 ☐ Black 9005 / White 9016

☐ Special: External RAL \_\_\_\_\_ Internal RAL \_\_\_\_\_

Handle Options:

Main Handle Options

☐ Lever/Lever\*

☐ Stainless Steel Brushed Satin Silver Lever/Lever with Split Escutcheon<sup>A</sup>

Lever/Lever Door Handle Colours

☐ White ☐ Grey ☐ Black ☐ Chrome

☐ Grey / White ☐ Black / White ☐ Satin ☐ Gold

Shootbolt Handle Options

☐ Internal locking shootbolt without cylinder\*

☐ Internal locking shootbolt with cylinder<sup>B</sup>

☐ Internal / External locking shootbolt handle with cylinder

D Handle and Hinge Colours

☐ Black\* ☐ Grey 7016 ☐ White

Dual Colours and Special Colour Profile - ONLY available in Black

Notes:

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\*As standard

<sup>A</sup>Only available in Brushed Satin Silver - Matching shootbolt is NOT available. We advise you choose the shootbolt handle to match either the profile or D Handle/Hinge colour.

<sup>B</sup>Standard with Non Doc Q / PAS24 Configurations



Features and Benefits:

- Super slim sightlines of 107mm
- Marine grade PAS24:2022 certified
- Energy efficient design with energy rating C
- As low as 1.4 U-Value
- Fast and easy 'Click and Forget' clip in bead
- Maximum height 3000mm (with lock extension)
- Maximum sash width 1200mm
- Ultra smooth bottom running
- Stock colours (White, Grey, Grey on White, Black and Black on White) on short reliable lead times
- Dual colour & special finishes available
- Intermediate doors have concealed shoot bolt locking with single point handle. Key locking optional

Size and Weight Restrictions:

|                   | Min    | Max    |
|-------------------|--------|--------|
| Overall Width:    | 1365mm | 8400mm |
| Overall Height:   | 1800mm | 3000mm |
| Panel Width:      | 600mm  | 1200mm |
| Weight Per Panel: |        | 120kg  |


Doors over 6500mm in width and/or 2500mm in height, will be supplied in kit form

Prior to delivery, The ALUNA Bi-folding Doors will be fully assembled (unless KIT form has been requested or required) and its operation carefully checked. No responsibility will be accepted unless the doors have been installed fully square, plumb and level in accordance with the code of practice for the installation of aluminium doors and windows (COP)W362/2. Toe and heeling of sashes is required.

CONFIGURATIONS

Externally Viewed


Reverse configurations also available, eg. 3-3-0 and 3-0-3

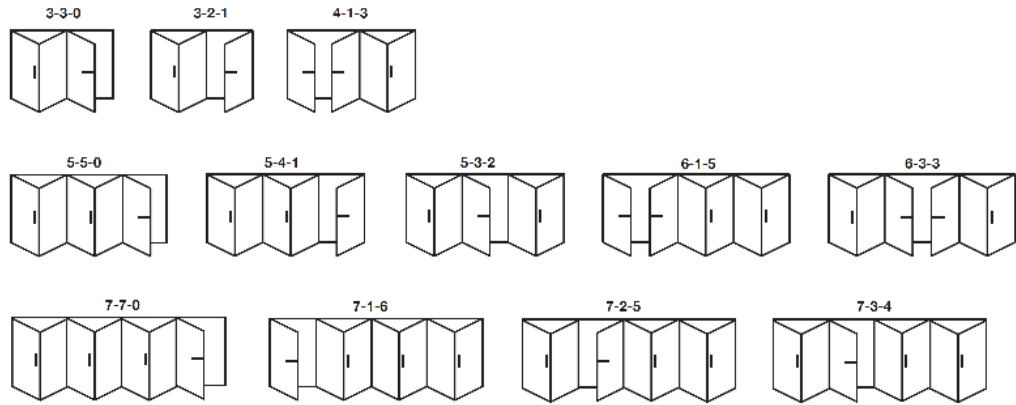

- Internal & External Main Access Door Handle Position  
Lever/Lever with cylinder & key
- | Shootbolt Handle Position  
Internal handle without cylinder or key

Non Document Q / PAS24 Compliant

Reverse configurations also available, eg. 2-0-2 and 2-2-0

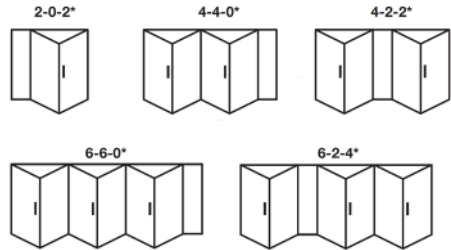

\*No external access as standard for these configurations  
Handles displayed are internal positioned

Both 'Internal locking with cylinder' and 'Internal / External locking with cylinder' options DO NOT comply with Document Q / PAS24

Sliders UK (Doors and Windows) Limited  
220 Cocker Road, Walton Summit Centre,  
Preston, Lancashire PR5 8BP  
T : 01772 698222 E : sales@sliders-uk.com  
W : www.sliders-uk.com

