



Please provide: ☐ Quotation ☐ Order

Date: _____

Contact Details:

Company Name: _____

Reference: _____

Delivery Address: _____

Postcode: _____

Name (present for delivery): _____

Mobile Number: _____

Main Requirements:

Externally Viewed

Total number of doors

Number of doors folding left

Number of doors folding right

Overall Measurement (including any cill, corner post, jamb, add-ons):

Width: _____ mm

Height: _____ mm

Recommended: Allow minimum 10mm tolerance between your overall frame size and your opening size

Opening direction:

☐ Outwards* ☐ Inwards

Corner Post:

☐ Left ☐ Right

Cill (cill height is 25mm and included in overall frame height):

☐ None* ☐ 90mm Stub ☐ 150mm ☐ 190mm ☐ 230mm

Additional 100mm for Cill Horns

☐ Yes* ☐ No - same as overall width ☐ Other _____ mm

Beading (supplied unglazed):

☐ 28mm* (for double glazed - pre-gasketed clip in bead)

☐ 36mm (for triple glazed - separate bead and wedge gasket)

Delivery Options:

☐ Fully assembled - with outer frame joints sealed with silicone*

☐ Outerframe sealed but sashes separate

☐ Kit form (compulsory if over 6500mm in width and / or 2500mm in height)

Configuration: VIEWED FROM OUTSIDE

Bottom Track Detail:

☐ Weather Rated Threshold*

☐ Integrated threshold with 150mm cill

☐ 20mm Silver Anodised Low Threshold - NOT Weather Rated

☐ Low Threshold (above) + Silver Anodised Rebate

☐ Low Threshold (above) + Silver Ext. Anodised Convenience Ramp

☐ Low Threshold (above) + Silver Int/Ext. Anodised Convenience Ramp

☐ Low Threshold (above) + Silver Anodised Rebate + Ext. Ramp

Drainage

☐ Face* ☐ Concealed (only with cill)

☐ None (internally used doors only)

Vents and Add-ons (trickle vents are only available in white, grey and black)

Vents in sash (1629mm²)^B ☐ 2 ☐ 3 ☐ 4 ☐ 5 ☐ 6 ☐ 7

Vents in 38mm Add-on (3954mm²)^B ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 ☐ 6

20mm Add-on ☐ Top ☐ Left ☐ Right

38mm Add-on ☐ Top ☐ Left ☐ Right

Profile Colour/s

☐ White 9016 Gloss ☐ Grey 7016 Matt ☐ Black 9005 Matt

☐ Grey 7016 / White 9016 ☐ Black 9005 / White 9016

☐ Special: External RAL _____ Internal RAL _____

Handle Options:

Main Handle Options

☐ Lever/Lever*

☐ Stainless Steel Brushed Satin Silver Lever/Lever with Split Escutcheon^A

Lever/Lever & Shootbolt Handle Colours

☐ White ☐ Grey ☐ Black ☐ Chrome

☐ Grey / White ☐ Black / White ☐ Satin ☐ Gold

Shootbolt Handle Options

☐ Internal locking shootbolt with cylinder*

☐ Internal locking shootbolt without cylinder - NOT PAS24 COMPLIANT

☐ Internal / External locking shootbolt handle with cylinder

D Handle and Hinge Colours

☐ Black* ☐ Grey 7016 ☐ White

Dual Colours and Special Colour Profile - ONLY available in Black

Notes:

*As standard

^AOnly available in Brushed Satin Silver - Matching shootbolt is NOT available. We advise you choose the shootbolt handle to match either the profile or D Handle/Hinge colour.

^BThe mm² per trickle vent



Features and Benefits:

- Super slim sightlines of 107mm
- Marine grade PAS24:2022 certified
- Energy efficient design with energy rating C
- As low as 1.4 U-Value
- Fast and easy 'Click and Forget' clip in bead
- Maximum height 3000mm (with lock extension)
- Maximum sash width 1200mm
- Ultra smooth bottom running
- Stock colours (White, Grey, Grey on White, Black and Black on White) on short reliable lead times
- Dual colour & special finishes available
- Intermediate doors have concealed shoot bolt locking with single point handle. Key locking optional

Size and Weight Restrictions:

	Min	Max
Overall Width:	1365mm	8400mm
Overall Height:	1800mm	3000mm
Panel Width:	600mm	1200mm
Weight Per Panel:		120kg


Doors over 6500mm in width and/or 2500mm in height, will be supplied in kit form

Prior to delivery, The ALUNA Bi-folding Doors will be fully assembled (unless KIT form has been requested or required) and its operation carefully checked. No responsibility will be accepted unless the doors have been installed fully square, plumb and level in accordance with the code of practice for the installation of aluminium doors and windows (COP)W362/2. Toe and heeling of sashes is required.

CONFIGURATIONS

Externally Viewed


Reverse configurations also available, eg. 3-3-0 and 3-0-3

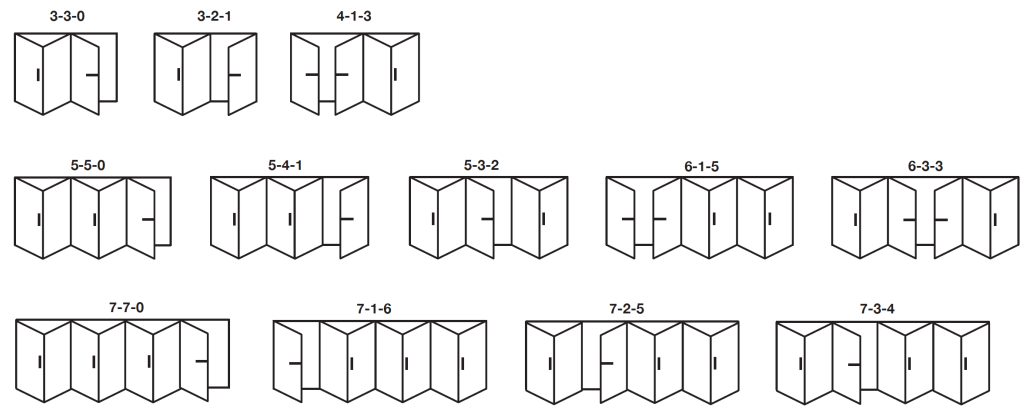

- Internal & External Main Access Door Handle Position
Lever/Lever with cylinder & key
- | Shootbolt Handle Position
Internal handle without cylinder or key

Non Document Q / PAS24 Compliant

Reverse configurations also available, eg. 2-0-2 and 2-2-0

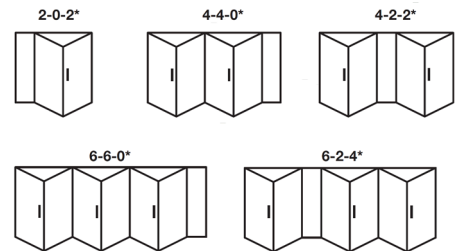

*No external access as standard for these configurations
Handles displayed are internal positioned

Both 'Internal locking with cylinder' and 'Internal / External locking with cylinder' options DO NOT comply with Document Q / PAS24

Sliders UK (Doors and Windows) Limited
220 Cocker Road, Walton Summit Centre,
Preston, Lancashire PR5 8BP
T : 01772 698222 E : sales@sliders-uk.com
W : www.sliders-uk.com

